
FITTINGS AND COMPONENTS FOR SENSOR PROBES

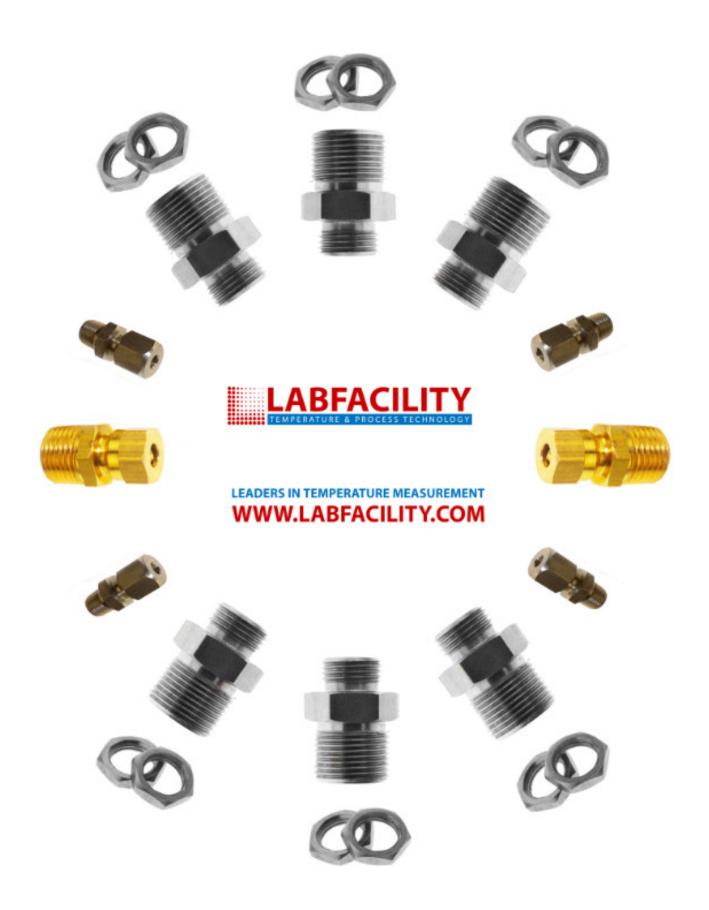

Contents

| Compression Fittings – stainless steel | Thermopockets 6 |
|---|--|
| Compression Fittings – brass | Swaged Tips6 |
| Olives & Locknuts – stainless steel & brass | Thread types, where applicable, include Imperial, Metric and US(NPT) as available. |
| Plugs,Nipples & Reducers4 | Alternative threads & dimensions are available to special |
| Bayonet Caps & Adaptors and Flanges5 | order. |
| Pot Seals | Specifications & availability may be subject to change. |

Part No.

FC-159

FC-161

FC-166

Compression Fittings – Stainless Steel



Compression Fittings (stainless steel)

| Part No. | Thread | To suit |
|----------|------------------------|--------------------------------|
| FC-129 | ⅓″ BSPP | 1.0mm |
| FC-132 | ½" BSPP | 1.5mm |
| FC-140 | ¹⁄ ₈ ″ BSPP | 3.0mm |
| FC-139 | ¹⁄ ₈ ″ BSPP | 1/8" |
| FC-203 | ¹⁄ ₈ ″ BSPP | 4.0mm |
| FC-143 | ¹⁄ ₈ ″ BSPP | 4.5mm |
| FC-137 | ¹⁄ ₈ ″ BSPP | ³ / ₁₆ " |
| FC-138 | ¹∕8″ BSPP | 6.0mm |
| FC-130 | ¹⁄ ₈ ″ BSPT | 1.0mm |
| FC-131 | ¹⁄ ₈ ″ BSPT | 1.5mm |
| FC-133 | ¹⁄ ₈ ″ BSPT | 3.0mm |
| FC-134 | ¹⁄ ₈ ″ BSPT | 1/8" |
| FC-141 | ¹⁄ ₈ ″ BSPT | 4.5mm |
| FC-135 | ½″ BSPT | ³ / ₁₆ " |
| FC-136 | ¹∕ ₈ ″ BSPT | 6.0mm |
| FC-150 | ¹⁄ ₈ ″ NPT | 1.0mm |
| FC-151 | ¹⁄ ₈ ″ NPT | 1.5mm |
| FC-152 | ¹⁄ ₈ ″ NPT | 3.0mm |
| FC-153 | ¹⁄ ₈ ″ NPT | 1/8" |
| FC-154 | ¹⁄8″ NPT | 4.5mm |
| FC-155 | ¹⁄ ₈ ″ NPT | ³ / ₁₆ " |
| FC-156 | ¹ ⁄8″ NPT | 6.0mm |

| FC-169 | ¹⁄₄″ BSPP | ³ /16" |
|--------|------------------------------------|-------------------|
| FC-168 | ¹⁄₄″ BSPP | 6.0mm |
| FC-170 | ¹⁄₄″ BSPP | 1/4" |
| FC-171 | ¹⁄₄″ BSPP | 8.0mm |
| FC-158 | ¹ ⁄ ₄ " BSPT | 3.0mm |
| FC-160 | ⅓″ BSPT | 1/8" |
| FC-162 | ¹⁄₄″ BSPT | 4.5mm |
| FC-163 | ¹⁄₄″ BSPT | ³ ⁄16" |
| FC-167 | $\frac{1}{4}$ " BSPT | 6.0mm |
| FC-165 | $\frac{1}{4}$ " BSPT | 1/4" |
| FC-172 | ¹⁄₄″ BSPT | 8.0mm |
| FC-180 | ¹ ⁄ ₄ " NPT | 3.0mm |
| FC-181 | ¹⁄₄″ NPT | 1/8" |
| FC-182 | $\frac{1}{4}$ " NPT | 4.5mm |
| FC-183 | $\frac{1}{4}$ " NPT | ³ ⁄16" |
| FC-184 | $\frac{1}{4}$ " NPT | 6.0mm |
| FC-185 | ¹ ⁄ ₄ " NPT | 8.0mm |
| FC-193 | 3/8" BSPP | 8.0mm |
| FC-197 | ³⁄8″ BSPT | 6.0mm |
| FC-195 | ³ ⁄8″ NPT | 6.0mm |
| FC-199 | ¹⁄2″ BSPP | 3.0mm |
| FC-205 | ½" BSPP | 4.5mm |
| FC-201 | ½" BSPP | 6.0mm |
| FC-212 | ½" BSPP | 8.0mm |
| FC-213 | ¹⁄2″ BSPP | 3/8" |
| | | |

Thread

1/4" BSPP

1/4" BSPP

1⁄4″ BSPP

To suit

3.0mm

4.5mm

Compression Fittings – Brass

Compression Fittings (stainless steel) cont.

| FC-209 | ¹∕2″ BSPT | 3.0mm |
|--------|------------------------------------|-------|
| FC-208 | ¹⁄2″ BSPT | 4.5mm |
| FC-200 | ½″ BSPT | 6.0mm |
| FC-210 | ½″ BSPT | 8.0mm |
| FC-211 | ½" BSPT | 3/8" |
| FC-240 | ¹∕2″ NPT | 3.0mm |
| FC-241 | ¹∕2″ NPT | 4.5mm |
| FC-242 | ¹∕2″ NPT | 6.0mm |
| FC-243 | ¹∕2″ NPT | 8.0mm |
| FC-244 | ½" NPT | 3/8" |
| FC-219 | ³ ⁄ ₄ " BSPP | 6.0mm |
| FC-220 | ³⁄₄″ BSPT | 6.0mm |
| FC-226 | M16 x 1.5 | 3.0mm |
| FC-223 | M16 x 1.5 | 6.0mm |
| FC-225 | M16 x 1.5 | 8.0mm |



Compression Fittings (brass)

| Part No. | Thread | To suit |
|----------|------------------------|--------------------------------|
| FC-016 | ⅓″ BSPP | 1.0mm |
| FC-017 | ¹⁄ ₈ ″ BSPP | 1.5mm |
| FC-018 | ¹⁄ ₈ ″ BSPP | 3.0mm |
| FC-003 | ¹⁄ ₈ ″ BSPP | 1/8" |
| LW-521 | ¹⁄ ₈ ″ BSPP | 4.0mm |
| FC-009 | ¹⁄ ₈ ″ BSPP | 4.5mm |
| FC-007 | ¹⁄ ₈ ″ BSPP | ³ / ₁₆ " |
| FC-012 | ¹⁄ ₈ ″ BSPP | 6.0mm |
| FC-010 | ¹⁄8″ BSPP | 1/4" |
| FC-015 | ¹⁄ ₈ ″ BSPT | 1.0mm |
| FC-001 | ¹⁄g″ BSPT | 1.5mm |

| Part No. | Thread | To suit |
|----------|-----------------------------------|--------------------------------|
| FC-002 | ¹∕8″ BSPT | 3.0mm |
| FC-004 | ¹∕8″ BSPT | ½" mm |
| FC-005 | ¹⁄ ₈ ″ BSPT | 4.5mm |
| FC-008 | ¹∕8″ BSPT | ³ ⁄16" |
| FC-011 | ½″ BSPT | 6.0mm |
| FC-014 | ½" BSPT | 1/4" |
| FC-112 | ¹⁄8″ NPT | 1.5mm |
| FC-021 | ¹⁄ ₈ ″ NPT | 3.0mm |
| FC-022 | ¹⁄ ₈ ″ NPT | 1/8" |
| FC-023 | ¹⁄ ₈ ″ NPT | 4.5mm |
| FC-024 | ¹⁄ ₈ " NPT | ³ ⁄16" |
| FC-025 | ¹ / ₈ " NPT | 6.0mm |
| FC-028 | ½" BSPP | 3.0mm |
| FC-031 | ¹∕₄″ BSPP | 1/8" |
| FC-038 | ¹∕₄″ BSPP | 4.5mm |
| FC-034 | ¹⁄₄″ BSPP | ³ ⁄16" |
| FC-036 | 1/4" BSPP | 6.0mm |
| FC-042 | ¹⁄₄″ BSPP | 1/4" |
| FC-041 | ½" BSPP | ⁵ / ₁₆ " |
| FC-029 | 1⁄4" BSPT | 3.0mm |
| FC-030 | ¹⁄₄″ BSPT | 1/8" |
| FC-032 | ¹⁄₄″ BSPT | 4.5mm |
| FC-033 | ¹⁄₄″ BSPT | ³ ⁄16" |
| FC-037 | ¹⁄₄″ BSPT | 6.0mm |
| FC-035 | ¹∕₄″ BSPT | 1/4" |
| FC-040 | ½" BSPT | ⁵ / ₁₆ " |
| FC-050 | 1/4" NPT | 3.0mm |
| FC-051 | ¹ ⁄ ₄ " NPT | 1/8" |
| FC-052 | ¹ ⁄ ₄ " NPT | 4.5mm |
| FC-053 | ¹ ⁄ ₄ " NPT | ³ ⁄16" |
| FC-054 | 1⁄4″ NPT | 6.0mm |
| FC-055 | ¹ ⁄ ₄ " NPT | 8.0mm |
| FC-064 | 3/8" BSPP | 3/8" |
| FC-060 | 3/8" BSPT | 1/4" |

3/8" BSPT

8.0mm

FC-062

Olives and Locknuts

Compression Fittings (brass) cont.

| Part No. | Thread | To suit |
|--------------------|------------------------------------|---------|
| FC-085 | ½″ BSPP | 3.0mm |
| FC-086 | ½" BSPP | 4.5mm |
| LW-520 | ½" BSPP | 6.0mm |
| Note: This item Zi | nc Plated Carbon . | Steel |
| FC-090 | ½" BSPP | 1/4" |
| FC-094 | ½" BSPT | 3.0mm |
| FC-013 | ½" BSPT | 4.5mm |
| FC-092 | ½" BSPT | 6.0mm |
| FC-091 | ½" BSPT | 1/4" |
| FC-097 | ½" BSPT | 8.0mm |
| FC-080 | ½" NPT | 3.0mm |
| FC-081 | ¹∕2″ NPT | 4.5mm |
| FC-082 | ¹∕2″ NPT | 6.0mm |
| FC-083 | ¹∕2″ NPT | 8.0mm |
| FC-084 | ¹∕2″ NPT | 3/8" |
| FC-098 | ³ ⁄ ₄ ″ BSPP | 6.0mm |
| FC-099 | ³⁄₄″ BSPT | 6.0mm |



Olives (stainless steel)

| Part No. | To suit |
|----------|-------------------|
| FO-051 | 1.0mm |
| FO-052 | 1.5mm |
| FO-053 | 3.0mm |
| FO-054 | 1/8" |
| FO-064 | 4.0mm |
| FO-055 | 4.5mm |
| FO-056 | ³ /16" |
| FO-057 | 6.0mm |
| FO-058 | 1/4" |
| FC-062 | 8.0mm |



Olives (brass)

| Part No. | To suit |
|----------|-------------------|
| FO-001 | 1.0mm |
| FO-003 | 1.5mm |
| FO-004 | 3.0mm |
| FO-005 | 1/8" |
| FO-014 | 4.0mm |
| FO-006 | 4.5mm |
| FO-007 | ³ /16" |
| FO-008 | 6.0mm |
| FO-009 | 1/4" |
| FO-013 | ⁵ ⁄16" |
| FO-012 | 8.0mm |



Locknuts (stainless steel)

| Part No. | Thread |
|----------|-----------|
| FL-253 | M8 x 1 |
| FL-250 | ⅓″ BSPP |
| FL-252 | ¹⁄₄″ BSPP |
| FL-255 | ½" BSPP |
| LW-832 | ³⁄₄″ BSPP |

Plugs, Nipples and Reducers



Locknuts (brass)

| Part No. | Thread |
|----------|------------------------------------|
| FL-240 | M8 x 1 |
| FL-236 | ¹⁄ ₈ ″ BSPP |
| FL-235 | ¹⁄₄″ BSPP |
| FL-237 | ¹∕2″ BSPP |
| FL-239 | ³ ⁄ ₄ ″ BSPP |





Plugs (stainless steel)

| Part No. | Thread |
|----------|-----------|
| FP-319 | ¹⁄8″ BSPP |
| FP-320 | ¹⁄₄″ BSPP |
| FP-323 | ½" BSPP |
| FP-324 | ³⁄4″ BSPP |
| FP-315 | 1/8" BSPT |
| LW-535 | ¹⁄₄″ BSPT |
| FP-317 | ½″ BSPT |
| LW-479 | ³⁄₄″ BSPT |
| FP-330 | M10 x 1 |
| FP-310 | M14 x 1.5 |
| LW-478 | M24 x 1.5 |

Nipples (stainless steel)

| Part No. | Thread | |
|----------|---|--|
| BC-454 | ½" BSPP x ⅓" BSPP | |
| FM-005 | ¹⁄ ₈ " BSPP x ¹∕ ₄ " BSPP | |





| BC-458 | ¹⁄8" BSPP x ¹∕2" BSPP |
|--------|-----------------------|
| FM-001 | ½" BSPP x ½" BSPP |
| FC-202 | ¹½" BSPP x ¹½" BSPP |
| FC-206 | ½" BSPP x ½" BSPT |
| FP-303 | ¹⁄2″ BSPP x ³⁄4″ BSPP |
| FM-008 | ¹⁄₂" BSPP x 1" BSPP |





Reducers (stainless steel)

| Part No. | Thread |
|----------|---|
| FR-370 | ½" BSPP x ⅓" BSPP |
| FR-373 | ³ ⁄ ₈ ″ BSPP x ¹ ⁄ ₄ ″ BSPP |
| FR-374 | ½″ BSPP x ½″ BSPP |
| FR-375 | ½″ BSPP x ¼″ BSPP |
| FR-378 | ½″ BSPT x ½″ BSPP |
| FM-002 | ½" BSPT x ¼" BSPP |
| FR-372 | $\frac{3}{4}$ " BSPP x $\frac{1}{4}$ " BSPP |





Reducers (brass)

| Part No. | Thread |
|----------|---|
| FR-350 | ¹⁄₄″ BSPP x ¹⁄გ″ BSPP |
| FR-351 | ³ %″ BSPP x ¹ %″ BSPP |
| FR-352 | ¹⁄2" BSPP x ¹∕4" BSPP |
| FR-353 | ³ ⁄ ₄ " BSPP x ¹ ∕ ₄ " BSPP |

Bayonet Caps & Adaptors and Flanges









Bayonet Caps (stainless steel)

| Part No. | ID | To suit spring | Slots |
|----------|-----------|-------------------|-------|
| CA-460 | 11.5mm ID | plain 3mm hole | 1 |
| CA-461 | 11.5mm ID | ³ /16" | 1 |
| CA-462 | 11.5mm ID | 6.0mm | 1 |
| CA-621 | 11.5mm ID | ³ /16" | 2 |
| CA-631 | 11.5mm ID | 6.0mm | 2 |
| CA-605 | 12.5mm ID | 6.0mm | 2 |
| | | | |



| Part No. | Length | Thread | Pegs |
|----------|--------|------------------------|------|
| CA-400 | 22mm | ¹∕8″ BSPP | 1 |
| CA-401 | 35mm | ¹∕8″ BSPP | 1 |
| CA-402 | 48mm | ¹⁄ ₈ ″ BSPP | 1 |
| CA-403 | 64mm | ½" BSPP | 1 |
| CA-408 | 100mm | ¹ ⁄8″ BSPP | 1 |
| CA-404 | 22mm | ½" BSPP | 2 |
| CA-405 | 35mm | M10 x 1 | 1 |







Bayonet Caps (BNP brass)

| Part No. | ID | To suit spring | Slots |
|----------|-----------|-------------------|-------|
| CA-451 | 11.5mm ID | ³ /16" | 1 |
| CA-114 | 11.5mm ID | 6.0mm | 1 |
| CA-452 | 12 5mm ID | 6.0mm | 2 |

Flanges (stainless steel)

| Part No. | Diameter | pcd | Thread |
|----------|----------|------|------------------------------------|
| CA-250 | 50mm | 40mm | ½″ BSPP |
| CA-253 | 50mm | 40mm | ¹⁄₄″ BSPP |
| CA-252 | 50mm | 40mm | ¹ / ₅ " BSPP |







Bayonet Adaptors (stainless steel)

| Part No. | Length | Thread | Pegs |
|----------|--------|-----------|------|
| CA-600 | 48mm | ¹⁄8″ BSPP | 1 |
| CA-601 | 64mm | ½″ BSPP | 1 |

Flanges (brass)

| Part No. | Diameter | pcd | Thread |
|----------|----------|------|---------|
| CA-251 | 50mm | 40mm | ⅓″ BSPP |

Pot Seals - Stainless Steel, Plain & Threaded









Pot Seals (plain stainless steel)

| _ | | | |
|----------|--------------------------------|-------|------|
| Part No. | Description | 'D'mm | 'Ľmm |
| LW-129 | Plain to suit 0.5mm | 6.35 | 32 |
| LW-130 | Plain to suit 1.0mm | 6.35 | 32 |
| LW-855 | Plain to suit 1.0mm | 6.35 | 15 |
| LW-131 | Plain to suit 1.5mm | 6.35 | 32 |
| LW-563 | Plain to suit 1.5mm | 9.5 | 43 |
| LW-126 | Plain to suit 2.0mm | 6.35 | 32 |
| LW-132 | Plain to suit 3.0mm | 6.35 | 32 |
| LW-565 | Plain to suit 3.0mm | 9.5 | 43 |
| LW-133 | Plain to suit 4.5mm | 9.5 | 44 |
| LW-550 | Plain to suit $\frac{3}{16}$ " | 9.5 | 25 |
| LW-134 | Plain to suit 6.0mm | 9.5 | 44 |
| LW-154 | Plain to suit 1.0mm | 8.0 | 30 |
| LW-815 | Plain to suit 1.5mm | 8.0 | 30 |
| LW-156 | Plain to suit 3.0mm | 8.0 | 30 |
| LW-127 | Plain to suit 1.0mm | 6.0 | 32 |

Pot Seals (threaded stainless steel)

| Part No. | Description | Thread | 'Ľmm |
|----------|------------------------|---------|------|
| LW-148 | M8x1 to suit 0.5mm | M8 | 35 |
| LW-147 | M8x1 to suit 1.0mm | M8 | 35 |
| LW-145 | M8x1 to suit 1.5mm | M8 | 35 |
| BC-353 | M8x1 to suit 2.0mm | M8 | 35 |
| LW-139 | M8x1 to suit 3.0mm | M8 | 35 |
| LW-149 | M8x1 to suit 3.0mm | M8 | 18.5 |
| LW-566 | M8x1 to suit 4.5mm | M8 | 35 |
| LW-146 | M8x1 to suit 6.0mm | M8 | 35 |
| LW-137 | 1/8" BSP to suit 1.5mm | ½″ BSPP | 44 |
| LW-138 | 1/8" BSP to suit 3.0mm | ½″ BSPP | 44 |
| LW-141 | 1/8" BSP to suit 4.5mm | ½″ BSPP | 44 |
| LW-142 | 1/8" BSP to suit 6.0mm | ½″ BSPP | 44 |
| | 'D' 'L' | | |
| | | | |
| ((| | | |

Thermopockets and Swaged Tips

Thermopockets

Stainless steel thermopockets of various sizes are designed for use with industrial style temperature probes to provide protection for the sheathing from corrosive media and to facilitate probe replacement without disturbing the process.

From stock, process connections are 1/2" BSPP as standard, a 1/8" BSPP compression fitting to suit diameter of probe is required to connect sensor to thermopocket (see pages 1&2).

Solid drilled, 303 stainless steel (12mm diameter stem)

| net | | |
|--|--|--|
| | | |
| | | |
| | | |
| Solid drilled high pressure version, 316 stainless steel (Tapered 12mm at tip) | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

| 316 stainless steel (7/16" | diameter stem) |
|----------------------------|----------------|
| 100mm | 6.0mm / 1/4" |
| 150mm | 6.0mm / 1/4" |
| 350mm | 6.0mm / 1/4" |
| 550mm | 6.0mm / 1/4" |
| | 150mm 350mm |

*Note: Sensor probe length should be minimum 50mm longer than stem of thermopocket to ensure complete entry and seating of probe via connection with compression fitting.

Swaged Tips

A **swaged tip** sheath combines quick thermal response with rugged probe construction. It allows good thermal sensitivity in processes in which such response would be difficult to achieve – a small thermal mass insertion length would otherwise require a thin wall, small diameter probe which would be vulnerable to damage in an industrial application.

Swaged tip probes are of particular value in flowing fluids media (gas, liquids etc), H&V applications, process plant and any application where a large thermal mass sensor would compromise accuracy and efficiency.

The sheaths have a relatively large diameter protection sheath over the main length to provide good physical protection to the sensor; the tip portion is swaged to the reduced outside diameter to achieve rapid thermal response.