

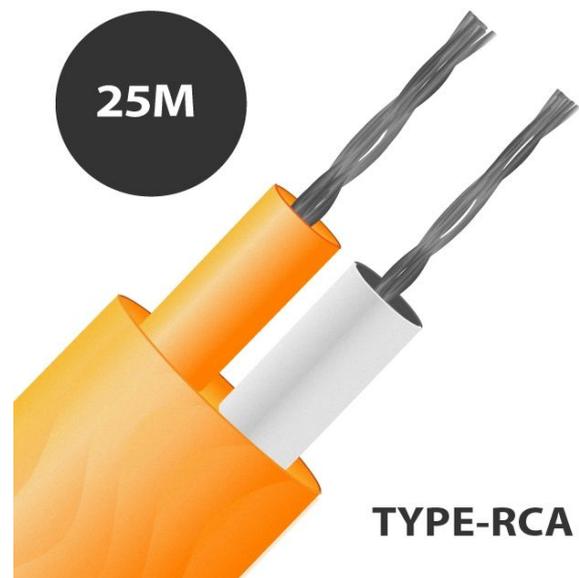


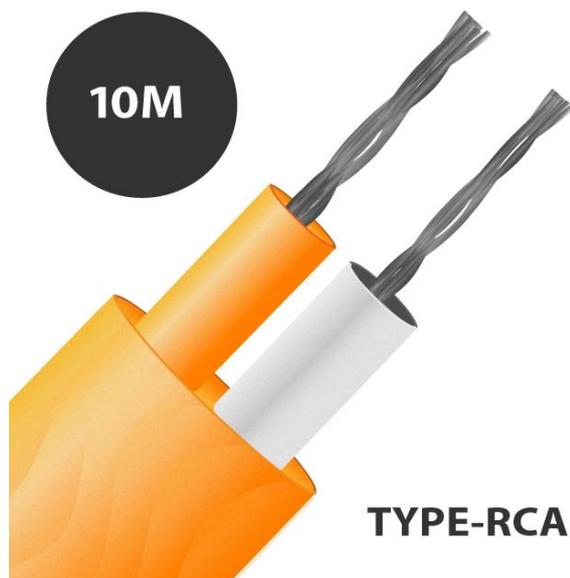

LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

Thermoelement-Kompensierungskabel / Draht (IEC) Typ U (RCA) (SCA) PVC Isoliertes flaches Paar für den Einsatz mit Typ R&S Thermoelementen 13/0,2 mm

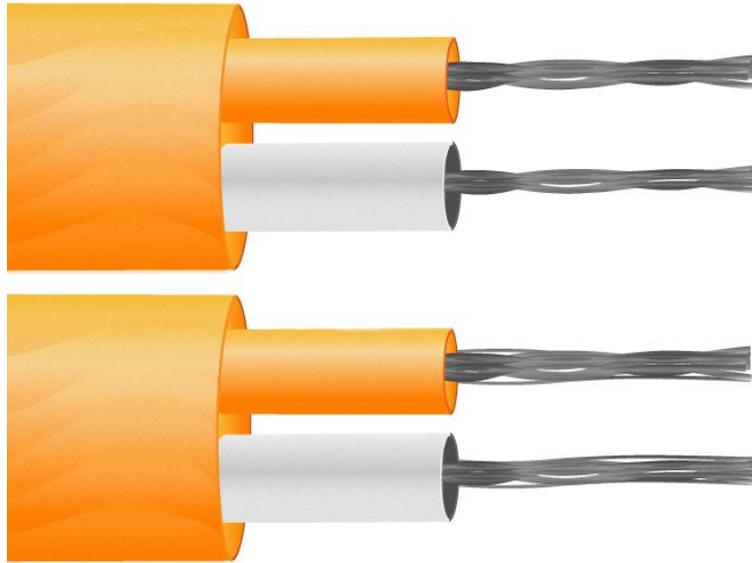

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Technische Daten
Specifications

General Description	Good general purpose insulation for 'light' environments. Waterproof and very flexible.
Cable Length	10, 25, 50, 100m, 200m
Cable Type	Flat pair construction
Core / Strands	13/0.2mm
Conductor Cross Section 13/0.2 (mm²)	0.408
Outer Colour	Orange
+ Colour	Orange
- Colour	White
Insulation Material	PVC Insulated
Loop Resistance 13/0.2 (Ohms per combined metre)	0.1
Max. Temperature	105°C
Min. Temperature	-10°C
+ Conductor	Copper
- Conductor	Copper Nickel
Screen	No
Standards Met	Colour code (cores & jacket) to IEC-584-3
Termination Type	U (RCA) (SCA)



LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

Tolerance	Class 2
-----------	---------