




LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

0,25 mm Durchmesser Schnell reagierendes mineralisiertes Thermoelement mit Gewindetopf und PFA IEC-Endstücken - Typ K - Isolierte Verbindungsstelle - 250 mm

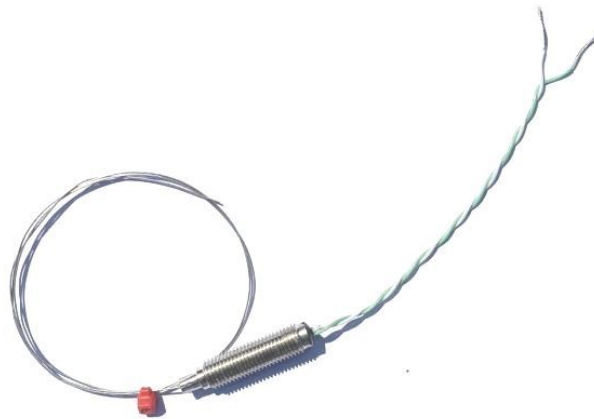

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Mssen Sie Ihren Temperatursensor kalibrieren?

Rckfhrbar auf ISO17025 (UKAS) Kalibrierstandards bietet Labfacility die Wahl zwischen einer 3- oder 5-Punkt-rckfhrbaren Kalibrierung mit unserer hauseigenen Kalibriereinrichtung, Sie knnen beliebige Temperaturpunkte zwischen -10 C und +200 C auswhlen.

Bitte beachten Sie, dass Sie bezüglich der Lieferinformationen kontaktiert werden, wenn Sie Ihrer Bestellung eine Kalibrierungsoption hinzufügen.

Specifications

Product Code	XE-0914-001
General Description	Highly flexible, sheath can be bent/formed to suit many applications and processes
Sensor Type	Type K IEC MD STYLE probes 0.25mm
Thermocouple Junction	Single element, junction insulated
Probe Length	250mm
Sheath Material	Stainless steel 316 sheath
Pot Type	M8 x 1.0mm fine pitch threaded pot seal (200°C)
Cable Length	100mm
Cable Type	PFA insulated twin twisted IEC
Core / Strands	7/0.2mm
Range	Sensor range -40 to +260°C
Important Information	A 1%+ Length Tolerance applies